



SECTION 4: SPECIALITY FRAMELESS DOOR SYSTEMS INDEX

Product	Page
Glass Glide Ceiling or Wall Mount	4.1, 4.2
Glass Glide Ceiling Mount with Sidelight Carrier	4.3, 4.4
Metro MF250 Heavy Duty Top Hung Sets	4.5
Metro MR590 Bottom Sliding System	4.6
Linear 100 Bottom Sliding Door System	4.7
Linear 153 Bottom Sliding Door System	4.8
Metro Glass Tech MF75 Folding Door Sets	4.9
Dorma Agile 150 Top Hung Sets	4.10
Dorma RS120 Top Hung Sets	4.11
Dorma Manet Top Hung Sets	4.12
Dorma HSW Stacking and FSW Folding	4.13

SPECIALITY FRAMELESS DOOR SYSTEMS

Glass Glide Sliding Door Set


Specify 8mm, 10mm or 12mm glass thickness

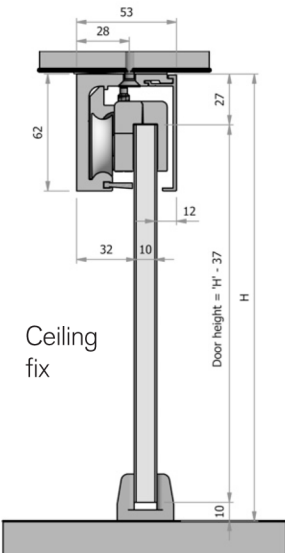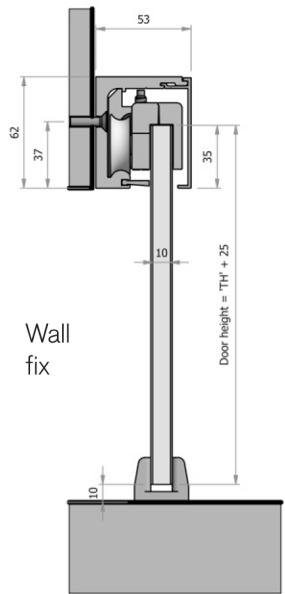Product	Code	Description	Per Set
 <p>Ceiling fix</p>		<p>Features Slim profile track Top hung system Suitable for ceiling or wall fix installations No glass cutout required</p> <p>Each set contains Track, Pelmet, Hangers, Stops, End Caps & Floor guides</p> <p>Maximum door weight 150kg</p>	
	GG.CW2000	Door set to suit door up to 1000mm wide	
	GG.CW3000	Door set to suit door up to 1500mm wide	
	GG.CW5000	Door set to suit door up to 2500mm wide	
	GG.DK	Kit for additional door including Hangers, Stops & Guides	
 <p>Wall fix</p>	Door seals available refer to pages 3.20, 3.21		
	Please note always specify glass thickness when ordering		

SPECIALITY FRAMELESS DOOR SYSTEMS

Glass Glide Sliding Door Setout Details

Specify 8mm, 10mm or 12mm glass thickness

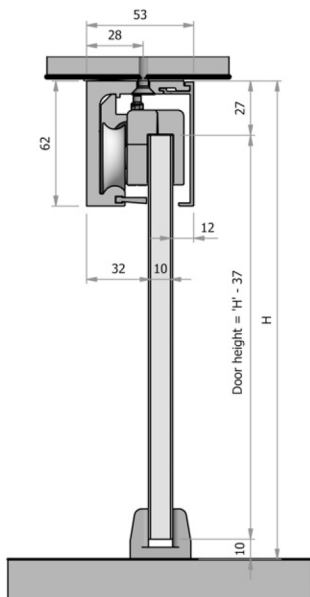


Ceiling fix

To determine door height

H = Overall opening height

DH = Glass door height

DH = H less 37mm

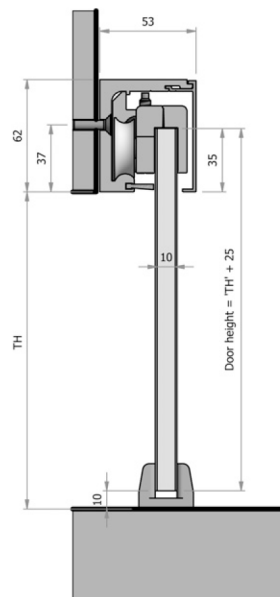

Wall fix


To determine door height

TH = Opening height to

underside of transom

DH = Glass door height

DH = TH plus 25mm

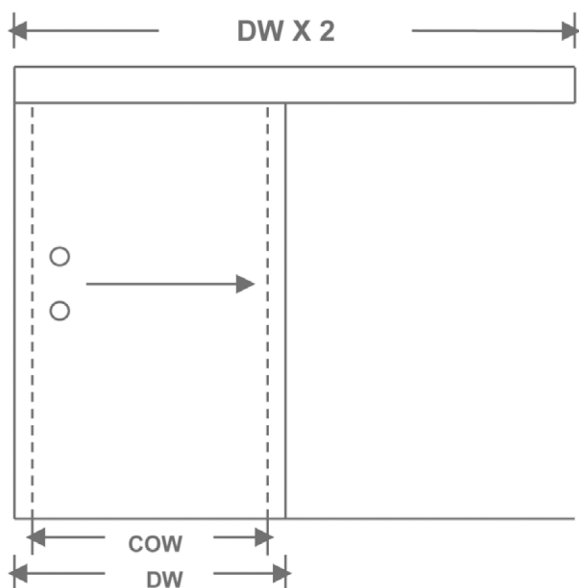

To determine door width

COW = Clear opening width

DW = Door width

Doors typically overlap the clear opening by 35mm each side



Eg. DW = COW + 70mm

Track length is 2 x door width

SPECIALITY FRAMELESS DOOR SYSTEMS

Glass Glide Ceiling Mount with Sidelight Carrier



Specify 8mm, 10mm or 12mm glass thickness

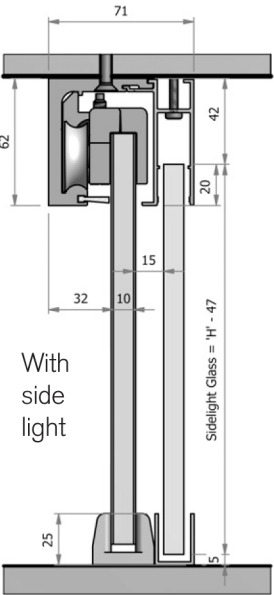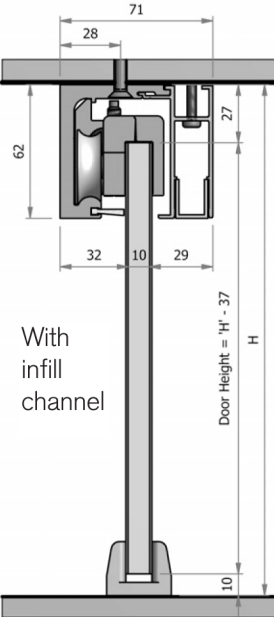Product	Code	Description	Per Set
		<p>Features</p> <ul style="list-style-type: none"> Slim profile track with sidelight carrier section Top hung system Suitable for ceiling fix installations No glass cutout required Natural anodized finish <p>Each set contains</p> <ul style="list-style-type: none"> Track, Sidelight carrier section, Infill channel for carrier Hangers, Stops, End Caps & Floor guides <p>Maximum door weight 150kg</p>	
	GG.SP2000	Door set to suit opening up to 2000mm wide (Door & sidelight)	
	GG.SP3000	Door set to suit opening up to 3000mm wide (Door & sidelight)	
	GG.SP5000	Door set to suit opening up to 5000mm wide (Door & sidelight)	
	GG.DK	Kit for additional door including Hangers, Stops & Guides	
<p>Door seals available refer to pages 3.20 Glazing Channel CS25 refer to page 3.22</p>			
<p>Please note always specify glass thickness when ordering</p>			

SPECIALITY FRAMELESS DOOR SYSTEMS

Glass Glide Ceiling Mount with Sidelight Carrier

Specify 8mm, 10mm or 12mm glass thickness

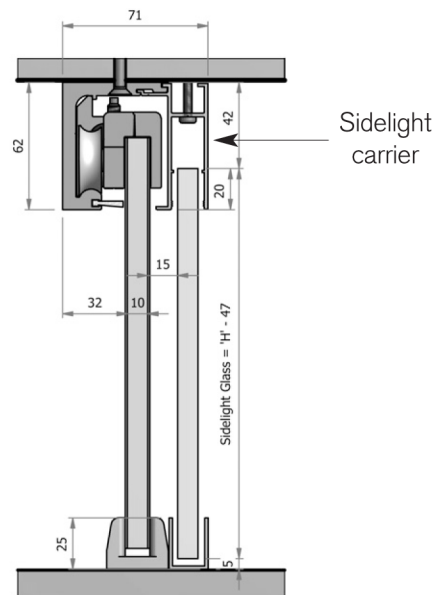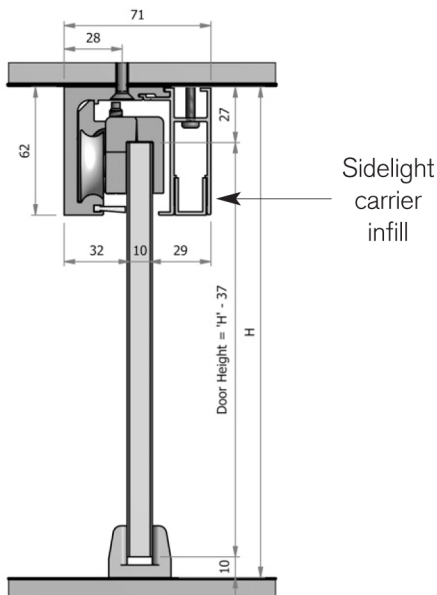

To determine the height of glass doors & sidelights



H = Overall opening height

DH = Glass door height

DH = H less 37mm

SL = Glass sidelight height

SL = H less 47mm

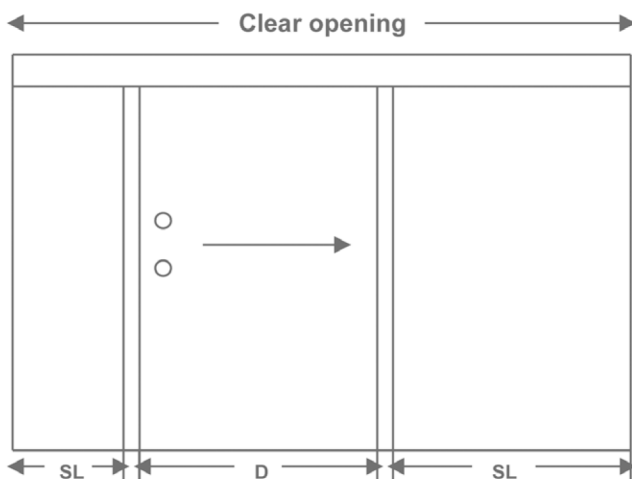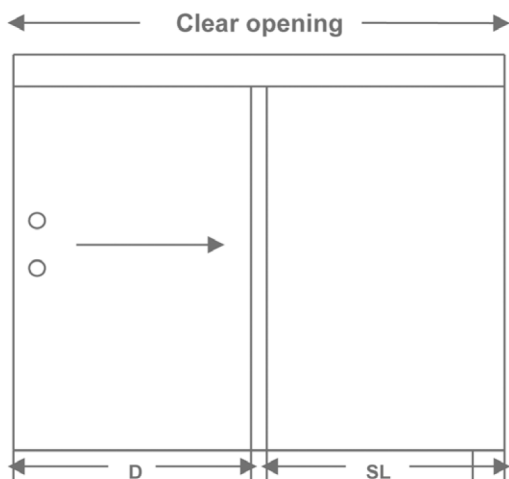

With the Metro Glass Glide sliding door & sidelight system there are numerous set out options.

Above are two of the more common options.

Note: It is recommended that the door and sidelight overlap be 35mm each side.

When glazing side lights specify CS25 channel.

Specify 10mm or 12mm glass thickness


Technical drawing of a two-stage pump assembly. The drawing shows a top view and two longitudinal sections. Dimensions are given in mm. The top view shows a total width of 96 mm and a distance of 48 mm between the centers of the two stages. The longitudinal sections show a total height of 100 mm, with a distance of 72 mm between the centers of the two stages. The drawing includes various components such as the pump housing, impeller, and shaft.


Double lines of
track and channels

SPECIALITY FRAMELESS DOOR SYSTEMS

Metro MRS90 Sliding Rail Set

Specify 10 mm or 12 mm glass and door width

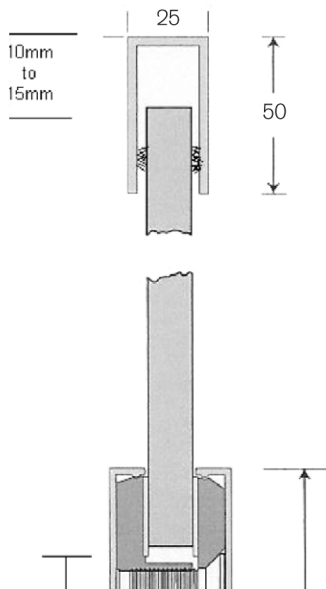Product	Code	Description	Price
		Bottom Rail Sliding System Maximum door weight 180kg. Each kit contains bottom sliding rail, bottom track, top channel and 2 channel stops. Finish Natural Anodised.	
	MRS90-1250	Door kit to slide single door up to 1250mm wide.	
	MRS90-000	Custom Door Kit Can be designed with multiple lines of track for several doors opening in the same direction and biparting applications.	P.O.A.
	MRS90-L	Bottom Lock with Keeper	

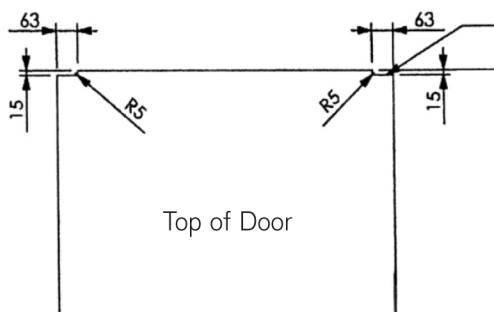


Top of Door

Details of top of Door.
Notch Setout to
accommodate top
Channel Stops.

SPECIALITY FRAMELESS DOOR SYSTEMS

Linear 100 Sliding Door System

Specify 10mm or 12mm glass thickness

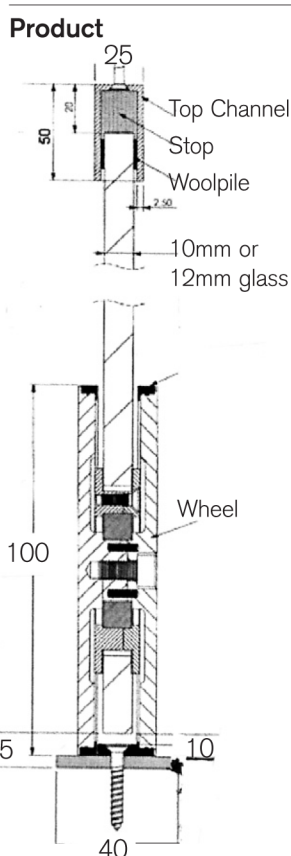Product	Code	Description	Per Set
 <p>Typical Glass Set Out</p>		Bottom Rolling Sliding Door System. Floor/Ceiling Fix Max door weight 170kg Each door kit contains: 2 x 100 Wheels Satin Stainless Steel 2 x Top Channel stops 2 x Top Channel Natural Anodised 1 x Bottom Channel Natural Anodised	
	L100-1000	Door kit for one door up to 1000mm wide All components as above Track & Channel 2000mm	
	L100-1500	Door kit for one door up to 1500mm wide All components as above Track & Channel 3000mm	
	L100-2000	Door kit for one door up to 2000mm wide All components as above Track & Channel 4000mm	
		Components	Per Metre
	L153-T40	Additional Bottom Track	
	L153-C50	Additional Top Channel	
		Side mount channel Fittings available on request	P.O.A.
		System can be used with multiple lines of track for several doors opening in the same direction and biparting applications	P.O.A.

X = height of door which is finished opening height less 35mm

Note: Allow for selected handle glass preparation








Note: Allow for selected handle glass preparation

SPECIALITY FRAMELESS DOOR SYSTEMS

Metro Glass Tech MF75 Folding Door Sets

Product	Code	Description	Per Set
---------	------	-------------	---------

This system is designed to operate 10mm Frameless Glass Doors up to 2500mm H x 950mm W in internal installations. Kit for each set includes: Track, Channel, Pivot set, Hangers, Guide Hinges and Bottom Locks. Finish is satin silver. Specify LH or RH pivoting end. Glass Door preparation drawings available on request.

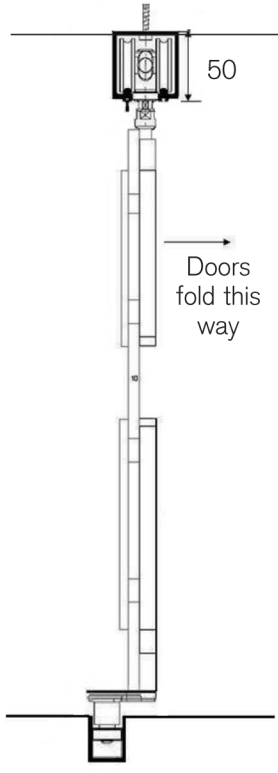	MF75-2	Door kit for two doors L/H set shown		
	MF75-3	Door kit for three doors L/H set shown		
	MF75-4	Door kit for four doors R/H set shown		
	MF75-5	Door kit for five doors R/H set shown		
	MF75-6	Door kit for six doors L/H set shown		
	94TA	Optional threshold channel Where channel cannot be recessed into floor		P.O.A.
		Note: For uneven Door sets, end door can be fitted with latch or lockset. See section 3 page 3.13		

SPECIALITY FRAMELESS DOOR SYSTEMS

Dorma Agile 150 Straight Sliding

Specify 8mm, 10mm or 12mm glass thickness

Product	Code	Description	Per Set
	AG950	<p>Single Door Installation Ceiling Fix Max Door weight 150kg Kit for one door up to 950mm wide Kit includes track, pelmet, hangers, stops and floor guide. <u>Side fix options available P.O.A</u></p>	
	AG1450	<p>Single Door Installation Ceiling Fix Max door weight 150kg Kit for one door up to 1450mm wide Kit includes track, pelmet, hangers, stops and floor guide. <u>Side fix options available P.O.A</u></p>	
	AG1900	<p>Door and Sidelight Installation Ceiling Fix Max door weight 150kg Kit for one door and sidelight 1900mm overall opening Kit includes track, sidepanel carrier, hangers, stops and floor guide.</p>	
	AG2900	<p>Door and Sidelight Installation Ceiling Fix Max door weight 150kg Kit for one door and sidelight 2900mm overall opening Kit includes track, pelmet, sidepanel carrier, hangers, stops and floor guide.</p>	

SPECIALITY FRAMELESS DOOR SYSTEMS

Dorma RS Straight Sliding Door Sets

Specify 8mm, 10mm or 12mm glass thickness


Product	Code	Description	Per Set
	RS950	Kit for One Door up to 950mm wide Max door weight 120kg Kit includes track, hangers, clamps, stops, floor guide and fixings	
	RS1450	Kit for One Door up to 1450mm wide Max door weight 120kg Kit includes track, hangers, clamps, stops, floor guide and fixings	
	RS121	Additional Track	Per Metre
	RS120	Optional Nat. Anodised Pelmet	
	RS122	Optional Nat. Anodised Side Panel Section	


10d Maurice Rd, Penrose
PO Box 12065, Penrose, Auckland 1642, New Zealand
Phone 09 526 4094 Fax 09526 4241
Website www.platinumhg.co.nz

SPECIALITY FRAMELESS DOOR SYSTEMS

Dorma Manet Straight Sliding Door Set

Specify 10mm or 12mm glass thickness

Product	Code	Description	Price
	MA15	<p>Tubular sliding door system</p> <p>Single door installation</p> <p>Max door weight 100kg</p> <p>Kit for one door up to 1500mm</p> <p>Kit includes track, hangers, fixing brackets, stops and floorguide.</p> <p>Specify brackets for glass fixing or wall fixing.</p>	

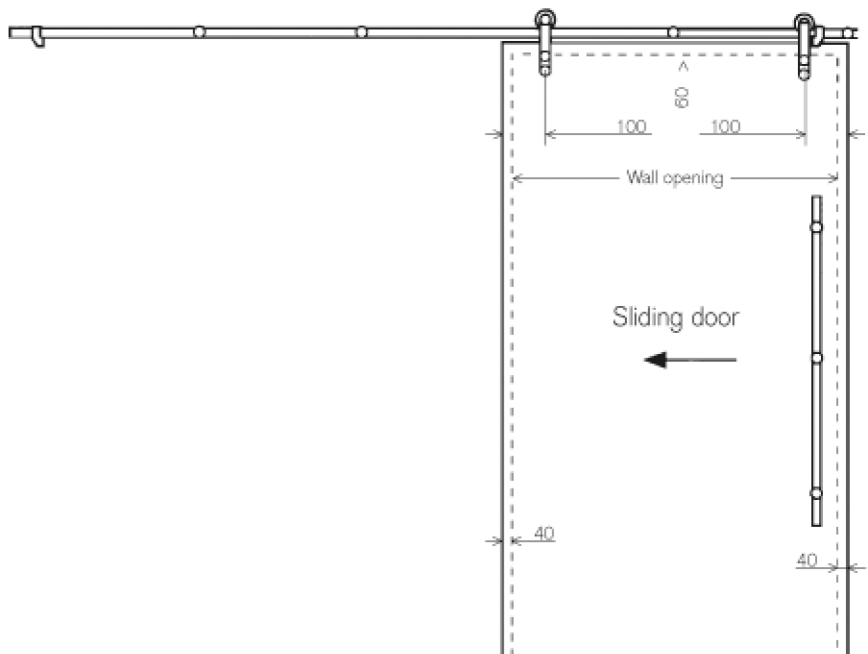


SPECIALITY FRAMELESS DOOR SYSTEMS

Dorma HSW Stacking


Dorma HSW is a sliding stacking system for frameless glass door panels. Ideal as room partitions and shopfronts. Allows complete frontage to be opened up. No floor channel is required.

Max panel size 3000mm (h) x 1200mm (w) x 12mm P.O.A

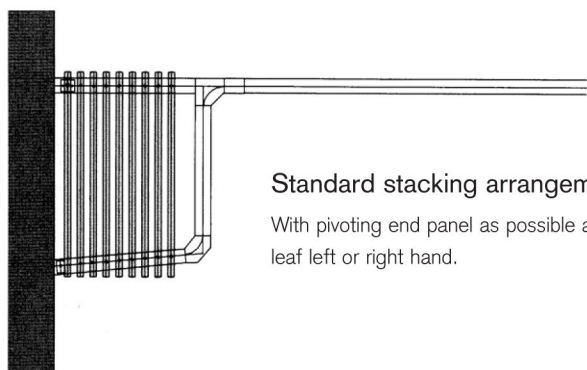

Standard stacking arrangement.


With pivoting end panel as possible access leaf left or right hand.

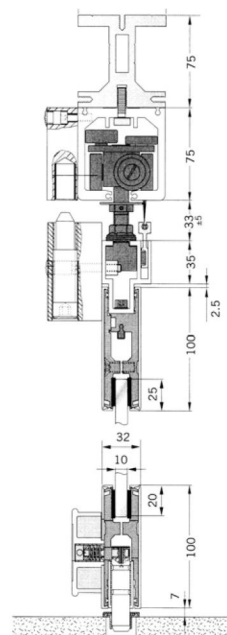

Dorma FSW Folding

Dorma FSW is a frameless glass door folding system. Doors are operated in modules of 2, 4 and 6 panels folding to a jamb.

Max panel size 3000mm (h) x 1000mm (w) x 12mm P.O.A

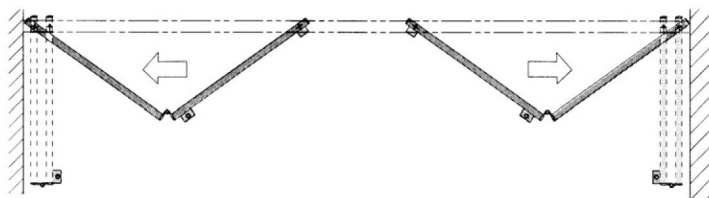

Detail shows 2 x two panel sets

