


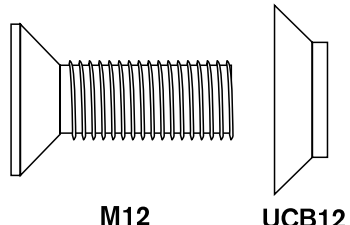



SECTION 2: GLASS FIXINGS

INDEX

Product	Page
Uncovered Counter Sunk Bushes - Black or White	2.1
Covered Counter Sunk Bushes - 304SSS Cap	2.2
Anchor Spanner	2.3
Button Head Fixings	2.4
Button Heads, Spacers, Lagscrew, Threaded Rod	2.5
Nuts, Washer, Gaskets	2.6
Button Head Standoff Anchors	2.7
Covered Countersunk Standoff Anchors	2.8
Glass Standoff Anchor Order Request / Price Request Form	2.9





GLASS FIXINGS - UNCOVERED COUNTERSUNK BUSHES


Set Screws Uncovered Bushes	Code	Description	Price
 <p>M6 UCB6</p>	UCB6	<p>BUSH to suit 8 & 10mm glass UCB6 bush only UCB6 bush with CSK screw up to 50mm Specify wood or metal fix screw ØA = 18mm ØB = 10mm Specify black or white colour bush</p>	
 <p>M8 UCB8</p>	UCB8	<p>BUSH to suit 8, 10 & 12mm glass UCB8 bush only UCB8 bush with CSK screw up to 50mm Specify wood or metal fix screw ØA = 20mm ØB = 12mm Specify black or white colour bush</p>	
 <p>M10 UCB10</p>	UCB10	<p>BUSH to suit 8, 10 & 12mm glass UCB10 bush only UCB10 bush with M10 x 50 stainless steel set Screw ØA = 24mm ØB = 16mm Specify black or white colour bush</p>	
 <p>M12 UCB12</p>	UCB12	<p>BUSH to suit 10, 12 & 15mm glass UCB12 bush only UCB12 bush with M12 x 50 stainless steel set Screw ØA = 28mm ØB = 18mm Specify black or white colour bush</p>	

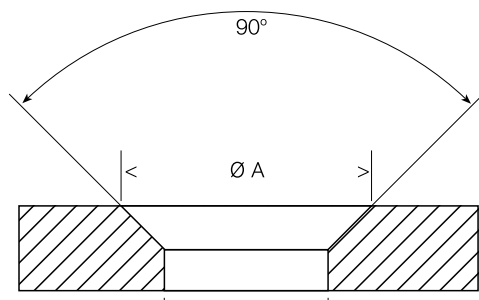

HOLE PREPARATION


GLASS FIXINGS - COVERED COUNTERSUNK BUSHES

Set Screws Covered Bushes	Code	Description	Price
 <p>CCB4 M4</p>	CCB4	STAINLESS STEEL COVERED BUSH to suit 6mm glass CCB4 covered bush only CCB4 bush with M4 x 25mm stainless steel screw Specify wood or metal fix screw $\varnothing A = 16\text{mm}$ $\varnothing B = 7\text{mm}$	
 <p>CCB6 M6</p>	CCB6	STAINLESS STEEL COVERED BUSH to suit 8 & 10mm glass CCB6 covered bush only CCB6 bush with M6 x 50mm stainless steel screw Specify wood or metal fix screw $\varnothing A = 22\text{mm}$ $\varnothing B = 10\text{mm}$	
 <p>CCB8 M8</p>	CCB8	STAINLESS STEEL COVERED BUSH to suit 8, 10 & 12mm glass CCB8 covered bush only CCB8 bush with M8 x 50mm stainless steel screw Specify wood or metal fix screw $\varnothing A = 26\text{mm}$ $\varnothing B = 14\text{mm}$	
 <p>CCB10 M10</p>	CCB10	STAINLESS STEEL COVERED BUSH to Suit 10, 12 & 15mm glass CCB10 covered bush only CCB10 bush with M10 x 50mm stainless steel socket screw $\varnothing A = 30\text{mm}$ $\varnothing B = 18\text{mm}$	



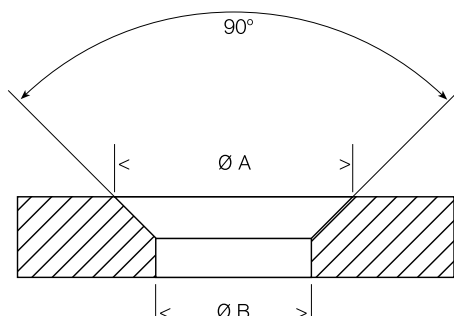


HOLE PREPARATION



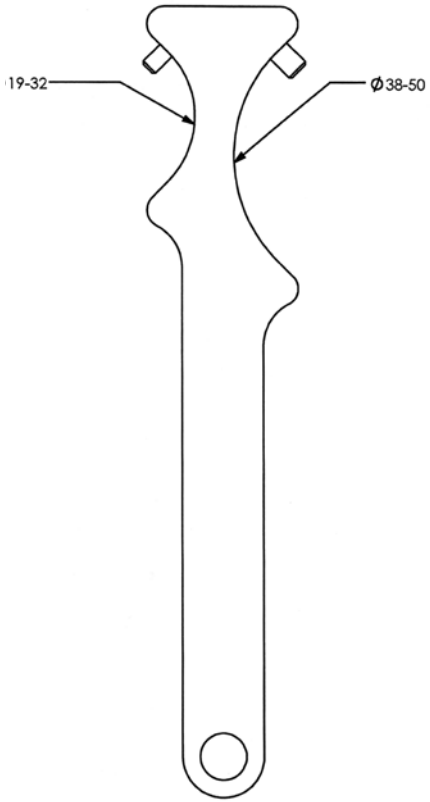


GLASS FIXINGS - ANCHOR SPANNERS

Produce	Code	Description	Price
	SP19-50	ANCHOR SPANNER TO SUIT 19mm to 50mm diameter Anchors	






GLASS FIXINGS - BUTTON HEADS

Button Head Fixings	Code	Description 304 stainless steel buttons	Price
 <p>"X" equals tightened thread length between button heads.</p>	DB19-X	Replace "X" in code with required length of thread between buttons when tightened.	
	DB25-X	DOUBLE BUTTON HEADS 19mm diameter	
	DB25-X	DOUBLE BUTTON HEADS 25mm diameter	
	DB32-X	DOUBLE BUTTON HEADS 32mm diameter	
		All double button heads are supplied with two nylon washers and sleeve.	
 <p>"X" equals length of rod.</p>	BT19-X	Replace "X" in Code with required length of threaded rod. Stock length 18mm.	
	BT25-X	BUTTON HEAD 19mm diameter	
	BT25-X	BUTTON HEAD 25mm diameter	
	BT32-X	BUTTON HEAD 32mm diameter	
		All single button heads are supplied with two nylon washers and sleeve.	
 <p>"X" equals length of Lag Screw. Minimum length 25mm Maximum length 55mm. Note: 50mm diameter minimum length 50mm</p>	BL19-X	Replace "X" in Code with required length of Lag Screw.	
	BL25-X	BUTTON HEAD 19mm diameter with Lag Screw	
	BL25-X	BUTTON HEAD 25mm diameter with Lag Screw	
	BL32-X	BUTTON HEAD 32mm diameter with Lag Screw	
		All single button heads are supplied with two nylon washers and sleeve.	
		Note: Lag Screw and Rod sizes 19mm Button - M6 } Minimum Lag Screw length 25mm 25mm Button - M6 } 32mm Button - M8 } Minimum Lag Screw length 30mm 38mm Button - M8 } 50mm Button - M10 - Minimum Lag Screw length 50mm	

GLASS FIXINGS - BUTTON HEADS & SPACERS

Product	Code	Description	Price
		304SSS Button with LDPE Washer & Sleeve	
	BH19	19mm diameter Button Head M6 thread	
	BH25	25mm diameter Button Head M6 thread	
	BH32	32mm diameter Button Head M8 thread	
		304SSS Spacer with LDPE Washer	
	SP19-5	19mm diameter x 5mm Spacer 7mm hole	
	SP25-5	25mm diameter x 5mm Spacer 7mm hole	
	SP32-5	32mm diameter x 5mm Spacer 8.5mm hole	
		304SSS Spacer with LDPE Washer	
	SP19-10	19mm diameter x 10mm Spacer 7mm hole	
	SP25-10	25mm diameter x 10mm Spacer 7mm hole	
	SP32-10	32mm diameter x 10mm Spacer 8.5mm hole	
		Lag Screws	
	M6-50ZL	M6 x 50mm zinc plated	
	M8-50ZL	M8 x 50mm zinc plated	
		Threaded Rods	
	M6-R25	M6 x 25mm stainless steel 304	
	M6-R32	M6 x 32mm stainless steel 304	
	M6-R60	M6 x 60mm stainless steel 304	
	M8-R25	M8 x 25mm stainless steel 304	
	M8-R60	M8 x 60mm stainless steel 304	



GLASS FIXINGS - NUTS, WASHER, GASKETS

Product	Code	Description	Price
		Hex Nuts	
	M6-HN	M6 stainless steel 304SS	
	M8-HN	M8 stainless steel 304SS	
	M10-HN	M10 stainless steel 316SS	
		Dome Nuts	
	M6-DN	M6 stainless steel 304SS	
	M8-DN	M8 stainless steel 304SS	
	M10-DN	M10 stainless steel 304SS	
		Spring Washers	
	M6-SW	M6 stainless steel 304SS	
	M8-SW	M8 stainless steel 304SS	
		Flat Washers	
	M6-FW12	M6 x 1mm x 12.5mm 304SS	
	M6-FW25	M6 x 1.6mm x 25mm 304SS	
	M8-FW16	M8 x 1.2mm x 16mm 304SS	
	M8-FW24	M8 x 2mm x 24mm 304SS	
		L.D.P.E. Gasket Washers (Opaque)	
	LG-16	M6 x .8mm x 16mm	
	LG-19	M8 x .8mm x 19mm	
	LG-23	M8 x .8mm x 23mm	
	LG-30	M8 x .8mm x 31mm	
		Specials	

GLASS FIXINGS - BUTTON HEAD STANDOFF ANCHORS

Code	Description 304 Satin Stainless Steel Anchors	Price
GSBH - 19 x 25	STAINLESS STEEL BUTTON HEAD 19mm diameter x 25mm standoff	
GSBH - 19 x 50	STAINLESS STEEL BUTTON HEAD 19mm diameter x 50mm standoff	
GSBH - 25 x 25	STAINLESS STEEL BUTTON HEAD 25mm diameter x 25mm standoff	
GSBH - 32 x 25	STAINLESS STEEL BUTTON HEAD 32mm diameter x 25mm standoff	

- When ordering, specify 50mm threaded rod or woodfix lag screw for wall fixing.
- Anchor diameter 19mm and 25mm – use M6 threaded rod and lag screw.
- Anchor diameter 32mm – use M8 threaded rod and lag screw.

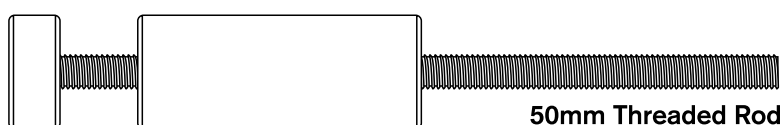

Please note

Custom size anchors available on request.


Simply fill in the order/enquiry form (page 2.9) and fax for quotations and orders.

For custom sizes allow 7 working days lead time.

GLASS FIXINGS - COVERED COUNTERSUNK STANDOFF ANCHORS

Code	Description 304 Satin Stainless Steel Anchors	Price
GSCC - 19 x 25	STAINLESS STEEL COVERED COUNTERSUNK 19mm diameter x 25mm standoff	
GSCC - 19 x 50	STAINLESS STEEL COVERED COUNTERSUNK 19mm diameter x 50mm standoff	
GSCC - 25 x 25	STAINLESS STEEL COVERED COUNTERSUNK 25mm diameter x 25mm standoff	
GSCC - 32 x 25	STAINLESS STEEL COVERED COUNTERSUNK 32mm diameter x 25mm standoff	

- When ordering, specify 50mm threaded rod or woodfix lag screw for wall fixing.
- Anchor diameter 19mm and 25mm – use M6 threaded rod, lag screw and CCB6 Bush.
- Anchor diameter 32mm – use M8 threaded rod, lag screw and CCB8 Bush.

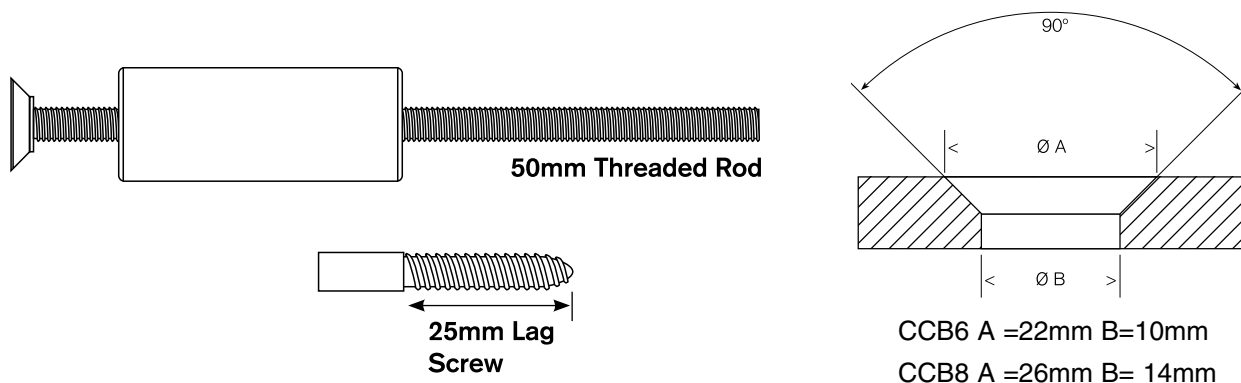

Please note

Custom size anchors available on request. P.O.A.

Simply fill in the order/enquiry form (page 2.9) and fax for quotations and orders.

For custom sizes allow 7 working days lead time.


Glass Standoff Anchors

Fax Order/Quotation Form

☐ Order Request ☐ Price Request

Company Name: _____ Order Number: _____

Contact Name: _____ Date: _____

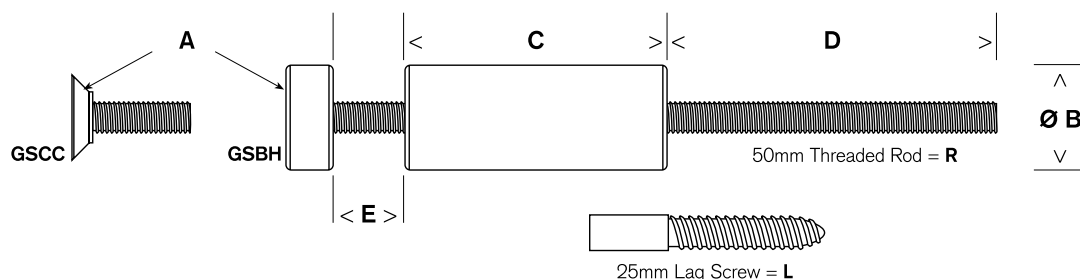


A Head Type	Covered Countersunk Bush Button Head	GSCC GSBH	<input type="text"/>
B Glass Anchor Diameter	Ø19mm, Ø25mm, Ø32mm, Ø38mm - 304SSS, Ø50mm - 316SSS		<input type="text"/>
C Standoff Length	25mm, 50mm, Special length (specify)		<input type="text"/>
D Fixing Type	Threaded Rod, 50mm long Wood Fix Lag Screw, 25mm long	R L	<input type="text"/>
E Glass Thickness	6mm, 8mm, 10mm, 12mm, 15mm, 19mm, Other (mm)		<input type="text"/>
F Quantity Required			<input type="text"/>

Anchor Diameter	Thread Size	Glass Hole Size For Button Head
Ø19mm and Ø25mm	M6	10mm
Ø32mm and Ø38mm	M8	12mm
Ø50mm	M10	16mm

Note

Before drilling or countersinking glass check catalogue for correct dimensions.

CCB HOLE PREPARATION

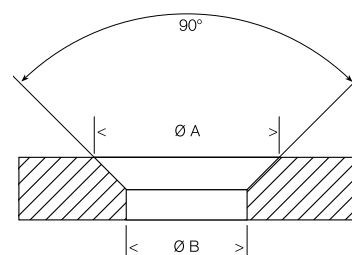

Anchor Diameter	Counter Sunk Head Type	Glass Counter Sunk Dimensions
Ø19mm x Ø25mm	CCB6	A=22mm B=10mm
Ø32mm x Ø38mm	CCB8	A=26mm B=14mm
Ø50mm	CCB10	A=30mm B=18mm